

Novel Framework for Selecting Cloud Provider Using Neutrosophic and Modified GAN

Mohammed Attya¹, Ahmed S. Sakr², H. M. Abdulkader², Faisal Al-Showaikh³ and M. Kamel El-Sayed⁴

¹Department of Information System, Faculty of Computers and Information, Kafrelsheikh University, Egypt

²Department of Information System, Faculty of Computers and Information, Menoufia University, Egypt

³College of Arts and Science, Ahlia University, Kingdom of Bahrain

⁴Basic Science Department, Higher Institute of Engineering and Technology, kafrelsheikh, Egypt

Received: 22 Dec. 2022, Revised: 13 Jan. 2023, Accepted: 23 Feb. 2023

Published online: 1 Mar. 2023

Abstract: In this paper cloud computing is very important for many companies in the process of progress. The main problem for any company when transferring their work to the cloud is selecting the most suitable cloud provider among the availability of different cloud service providers with different properties and different alternatives. This paper introduces a novel framework that can be used for selecting the most suitable provider in the case of missing values in the evaluation of alternatives. The framework is composed of two steps; the first step in the framework is about using the Modified Generative Adversarial Network (M-GAN) for data imputation of missing data. The modified version of GAN has achieved an accuracy of nearly 0.94. The second step is the Multi-Criteria Decision-Making (MCDM) neutrosophic algorithm for selecting the most suitable provider according to different eight criteria (Availability, Throughput, Successability, Reliability, Latency, Response time, Response Time of Customer Services, and Cost). According to the experiments done in the paper, the Novel framework has achieved success in choosing suitable providers. The presented model achieved 0.05 (sec) computation time for 1000 providers rather than 0.057 (sec), 0.061 (sec), and 0.065 (sec) in other mentioned works.

Keywords: Cloud service provider; Neutrosophic; GAN; Deep Learning.

1 Introduction

Cloud computing is a wide range of organizations. Cloud computing helps organizations use the most needed services online without the need to install them physically. The main problem for any organization is how to choose a suitable provider according to the available solutions and organizational requirements [1–3].

- 1- **Numerous criteria:** There are a large number of criteria and different requirements for organizations. For example, the requirements for each organization are so different that many organizations need to reduce costs while other organizations need to increase availability and security with a large budget.
- 2- **Experts' opinions:** Experts' opinions can affect positively or negatively the final process of choosing the provider among the available providers.

The main purpose of the framework is to choose the best provider among the available providers according to the

organization's requirements, especially in the case of missing data using the modified version of GAN [4–6].

Missing data is a hard and complex problem for each stockholder in the process of choosing suitable providers.

The GAN deep learning architecture can be used to generate missing or lost values. The GAN is divided into two parts; the first part is called a generator for generating the missing data, and the second part is called a discriminator for differentiating between (generated and the available) data. The discriminator is trained to reduce the classification loss, and the generator is trained to maximize the discriminator's misclassification rate.

Smarandache first introduced Neutrosophy in 1995 [7]. Neutrosophic sets include the classical set, fuzzy set, interval-valued intuitionistic set, etc. To make the use of neutrosophic sets easier, the single-valued neutrosophic set (SVNS) was developed [8]. Its membership is composed of three elements: truth, indeterminacy, and falsity. In a neutrosophic set, indeterminacy is quantified explicitly, and truth, indeterminacy, and falsity all have

* Corresponding author e-mail: mohammed3attya@gmail.com

distinct membership functions. This concept is crucial in a variety of settings, such as an information coalition, when seeking to combine the data from various sensors.

Multiple domains have used the same valued neutrosophic set [9–11]. When a decision maker expresses an opinion about a statement, he or she can remark that it is 50% true, 60% false, and 20% uncertain. Neutrosophic is thus one of the best models for actual decision-making processes since it takes into consideration truth (certain/yes), indeterminacy (unsure), and falsity (false/no) membership functions. As a result, it could handle vague, insufficient, and conflicting information successfully.

In turn, this will produce more accurate information, which will aid in making the appropriate choices. Although many of these applications are pricey, it can also be employed in a variety of professions and adoption scenarios [12–15].

MCDM based on a neutrosophic algorithm is used to analyzing the alternatives with respect to criteria weights that may be different from one organization to another according to their priorities [16–21]. Some organizations pay attention to cost in the first place, another organization may prefer the response time, and another may go for the availability.

Many algorithms have been published to handle the problem of selecting suitable providers in the cloud, such as Fuzzy [22–24], TOPSIS [25], AHP [26–29], ELECTRE [30], and neutrosophic VIKOR [31–34]. All of these methods can deal with the problem, but these algorithms cannot achieve high accuracy when missing data. The proposed framework can handle this problem.

This paper can be shown as:

- The novel framework can use modified GAN to manage different data types with missing values.
- The Framework uses MCDM algorithm based on neutrosophic for achieving success in selecting the best suitable provider while respecting the degree of intermediary.
- Neutrosophic Algorithm is modified to improve the computation time.
- The proposed framework can choose the suitable provider in the case of incompatible criteria, differences in interest in decision-makers and imprecision issues.

The rest of this paper is represents. The related works shown in Section 2. While in Section 3 explain as well as the main stages of framework, the discussion results appear in Section 4 and finally Section 5 represents the conclusion.

2 Related Work

In this section, An overview of the various Multi-Criteria Decision Making (MCDM) strategies used to choose the best cloud provider.

Choosing and making decisions is a major difficulty for decision-makers in many businesses [1, 2].

The challenge for businesses is to select the best cloud service providers that can meet their needs due to the diversity of cloud service providers [3, 35].

Calculating the cloud's best demands using cloud estimating the performance of a company's services is a difficult process [1, 36, 37].

It is important to start for calculating cloud services [16–21, 38–42].

Numerous examples of the cloud services evaluation and selection process are investigated using a variety of techniques.

In [43], used the analytic hierarchy process (AHP) to gauge how well cloud services are working for a company.

In [8], proposed a mathematical model for decision-making for selecting cloud computing in a multisourcing environment.

In [26], proved that AHP is a successful and efficient decision-making method, yet decision-makers' subjectivity can result in doing pairwise comparisons with uncertainty.

In [2], used the fuzzy set theory to get around this limitation. It can be used to solve a variety of issues because it involves some level of uncertainty, but the result is always some-what ambiguous, as shown in [28, 29].

In [44], used the analytical network process (ANP) incorporating zero-one goal programming to determine the standard of cloud services.

In [22], employed a technique to make fuzzy multi-criteria decisions according to the TOPSIS cloud computing assessment framework.

In [23, 24], used a new hybrid fuzzy technique that incorporates fuzzy sets and VIKOR.

There are many models for decision-making that combine neutrosophic sets for assessing and choosing convenient cloud service providers presented in [25, 30–34, 45–48].

In [49], assigned that DEMATEL, a decision-making, experiment, and evaluation facility approach, was used to choose a transportation service provider as a solution. After converting the expert language ratings to neutrosophic values using a neutrosophic set, the transport service providers were rated using DEMATEL.

In [50], study the supply chain management.

In [51], employed a CODAS (combined distance-based assessment) and an integrated neutrosophic set, it was determined where the wind energy facility was. To deal with the uncertainties, they employed an intermediate values neutrosophic set, and CODAS was used to locate the best area for a wind generator.

In [52], expanded TOPSIS and ANP for the supplier selection problem using neutrosophic set theory. Several authors have offered strategies for choosing cloud services.

In [53], established a selection technique to SaaS services using the AHP method. They assessed the SaaS service using a variety of QoS factors, such as usability,

budget, function, architecture, and vendor credibility, and then used AHP to score it. To demonstrate the strategy's value, a case study of the Salesforce automated services was conducted.

In [54], have looked into how the selection problem might be mapped in a cloud environment and in other settings, such as online services, grids, etc. They also developed a taxonomy to cloud-based quality of service operations. MAUT and the outranking approach were generally grouped together as the MCDM techniques. They provided a sample using the MAUT category approach and AHP to pick a cloud provider.

In [55], proposed a taxonomy for choosing a cloud service based on MCDM techniques. They reviewed numerous MCDM techniques along with comparative analyses of their use in diverse fields.

In [56], the SMICloud framework, which uses the AHP approach to rate cloud services.

In [57], built a cloud service rating system employing a better rank voting process. They also discovered a few new QoS metrics to add to the SMI architecture, which aids cloud consumers in assessing cloud computing. Software and consumer QoS measurements made up the two main groups. Consumer QoS includes QoS relevant to the cloud user experience, which is important from the user's point of view. Software QoS is concerned with application performance. The best cloud service was chosen using the new rank method of voting. It views the QoS that they offer as the ballot and the cloud services as the candidates on a vote. Depending on the services they offer, each CSP receives a QoS rating. To determine the best cloud service, the scores of each CSP according to each QoS were pooled.

In [58], declared that AHP and TOPSIS were used to construct a new trust evaluation framework that was tasked with finding a trustworthy cloud service. The appropriateness of each QoS option is assessed based on the subjective evaluations of each QoS made by cloud users using AHP. In order to determine the optimal cloud service based on AHP-established service reliability and weights, the TOPSIS was utilized.

In [59], an approach for assessing cloud services where QoS indicators are interdependent was offered. Their study uses an ANP model to mimic the relationship between QoS requirements and cloud service ranking. A node with edges for dependencies is used by ANP to represent cloud computing and QoS parameters as nodes. After integrating all priority vectors to score cloud computing, interdependence metrics are prioritized using the comparison matrix pairwise. As there are more cloud services and QoS requirements, ANP gets more challenging.

In [60], established a flexible framework that allows consumers and cloud experts to communicate their ideas linguistically for choosing cloud services in a fuzzy environment. They selected a cloud service using fuzzy TOPSIS and AHP. AHP was used to calculate the importance of the QoS criteria, and a triangular fuzzy

numbers and TOPSIS were coupled to manage fuzziness before scoring cloud computing.

In [61], additionally developed a novel architecture that used TOPSIS and AHP to score cloud computing in an open environment was also developed. The AHP technique is used to determine the importance of each QoS parameter based on the subjective assessment of cloud users. Not to mention, TOPSIS was used to evaluate cloud computing based on QoS evaluations from cloud comparison service suppliers.

In [62], developed a system for deciding which IaaS computing platform is best in a challenging circumstance. They used the scorecard to determine the most important QoS parameters from categories like business process, finance, etc. and the fuzzy Delphi technique to determine the most important QoS criteria from each element. The next step involved ranking the cloud services by determining the priority vector for each QoS metric using triangle fuzzy values and AHP.

In [63], developed a ranking system for cloud computing using entropy and the upgraded TOPSIS technique. The entropy approach was used to calculate the weights of the QoS parameter. In selecting the most appropriate cloud service, they changed the conventional TOPSIS by substituting the Minkowski length for the Euclidean length.

In [64], constructed a reliable system of reversed ranks using fuzzy TOPSIS to rate cloud computing in a fuzzy context.

In [65], develop a framework for service selection. In order to rank the cloud services. For the first time, neutrosophic set theory has been merged. The new approach rates cloud services in the neutrosophic environment efficiently and firmly. Numerous examples of the cloud services evaluation and selection process are investigated using a variety of techniques. Numerous examples of the Generative Adversarial Networks (GAN) using a variety of techniques have been used in different applications. In [4], using the deep learning method, proposed a novel neural system for mammography recognition. The use of AGAN to supplement the input set of images provided to the CNN classification system was a significant innovation. The normal test images may be correctly reconstructed using AGAN, which was trained on the normal set of images. The reconstruction of the anomalous images, however, is not similar. The disparities between the set of normal images (creating a uniform set of images) and the abnormal image set, which is now represented by the originals and their dissimilar reconstructions, have increased as a result. Additionally, we have suggested certain changes to the GAN structure (called AGAN). In [5], described a brand-new virtual sample generation technique that makes use of virtual samples to boost soft model prediction accuracy. They created methodology consists of two steps. The CVT sampling-related component is utilized to create fresh samples and then uniformizes data distribution. An implicitly probabilistic model called RegCGAN, which is

used to combine the results of fresh samples, is another component. By presenting two accuracy metrics (MSE and MAE) and one distribution goodness indicator. In [6], authors have demonstrated that the best attention unit for enhancing CNN performance is channel attention. K-means has a great ability to remove unusually-shaped generated images, magnifying the accuracy training from PGGAN augmentation. They infer that the data performance can be enhanced by using a min-max contrast between the discriminator and generator models of GAN.

Most of previous research focuses on MCDM with consistent and clear datasets. In our research, we intend to focus on two points of view, which are: handling missing data by using modified GAN [38–40] and achieving better results than previous research using the proposed Modified Neutrosophic Algorithm.

3 Material and Methods

This section describes the process used to create the framework that will be used to choose the most suitable provider, which can be summarized in the following steps:

Steps of methodology:

Step 1: Data Acquisition: Identify the Alternatives and Available Providers.

Step 2: Fill in the blanks with a modified GAN.

Step 3: Choose the best suitable provider among the available providers using a multi-criteria decision-making algorithm based on neutrosophic

And Figure 1 summarizes the entire processes that were used to create this framework.

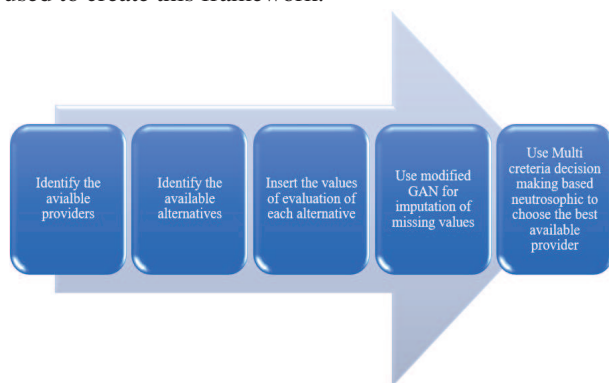


Fig. 1: Methodology steps

3.1 Cloud Service Provider Dataset

The framework depends on the dataset collected to describe different providers. The dataset collected the Quality of Service (QoS) performance of 80 cloud computing services (called a computing dataset) from the

Network-Testing Website of Cloud Harmony [66]. The dataset also uses different parameters for assessing different servers, such as availability, successibility, throughput, etc. The dataset contains nearly 1500 rows. The main problem with the dataset is the missing values, which need imputation. A version of GAN has been modified in this paper for imputation of the missing values to be used in a selected case study in the next section.

3.2 Imputation Missing Values Stage

GAN is modeling a learning model which contains two parts; the first part, which is called the generator, which is used to generate the missing data in the imputation process, and the other part, which is called the discriminator. This part is used to differentiate between the real or original data and the generated data by the generator part. The framework uses a modified version of GAN, which is called M-GAN, and consists of four steps.

Given The cloud dataset X , M matrix, which describes the missing values in the dataset, Z is the mean value in the dataset, which has values in the dataset.

1. Build the generator part using the next equation, which is called G , to produce the output using Equations 1 and 2.

$$\bar{X} = G((X \odot M + Z \odot (1 - M)), M), \quad (1)$$

$$\bar{X} = G((X \odot M + \bar{X} \odot (1 - M)), M). \quad (2)$$

2. Build Discriminator D Using the following equations, the B value is a randomly generated value, output is the output value which is fake or real, and value which provides more information to the discriminator as mentioned in Equations 3, 4 and 5.

$$h \in H = B \odot M + 0.5(1 - B), \quad (3)$$

$$B = (B_1, \dots, B_d) \in \{0, 1\}^2, \quad (4)$$

$$D_{output} = D(\bar{X}, H). \quad (5)$$

Where, M , G , X , Z and B are Circled Ring Operator, Matrix, Generator function, cloud dataset, mean value and parameters of the discriminator respectively.

3. Start the training process using mini patches and sample K using Equations 6, 7, and 8, and refer to the combination of the loss of continuous and categorical variables with separate weights

$$D_{loss} = \max_D [M \log D(\bar{X}, H) + (1 - M) \log(1 - D(\bar{X}, H))] \quad (6)$$

$$G_{loss} = \min_G (L_G + \alpha L_{M1} + \beta L_{M2}), \quad (7)$$

$$L_G = -(1 - M) \log D(\bar{X}, H). \quad (8)$$

4. Return to the original scale.

3.2.1 Performance Metrics

The framework uses five different performance matrices to evaluate the performance of the modified GAN in data imputation. The Framework uses recall, *F1*-score, precision, accuracy, and specificity, which have been calculated by the next mentioned equations.

$$\text{Precision} = \frac{TP}{TP + FP}, \tag{9}$$

$$\text{Recall} = \frac{TP}{TP + FN}, \tag{10}$$

$$F1 = \frac{2 \times \text{Precision} \times \text{Recall}}{\text{Precision} + \text{Recall}}, \tag{11}$$

$$\text{Accuracy} = \frac{TP + TN}{TP + FN + TN + FP}, \tag{12}$$

$$\text{Specificity} = \frac{TN}{TP + FP}. \tag{13}$$

3.3 Multi-Criteria Selection Method Based on Neutrosophic

This part of the paper describes the MCDM method and how method handles the problem of selecting the most suitable provider after imputation of the missing data using the modified GAN. The proposed method based on the neutrosophic divides the data into three sets: a true set to describe the degree of the true; a false set to describe the degree of the false; and an intermediate set to describe the degree of intermediacy. Figure 2 displays the block diagram of the selection process of the provider using the neutrosophic-based method. As mentioned in the block diagram, the process of selection consists of six steps:

1. Identifying the criteria of the cloud service provider and the features that must be found in this cloud service provider.
2. Identifying alternatives and parameters that will be the basis of the evaluation process for cloud service provider options.
3. Building a hierarchy using the alternatives and criteria to create the structure of the framework.
4. Converting the data to a neutrosophic set that will contain three parameters (truth, indeterminacy, and fault).
5. Calculating the weights for each alternative according to the previous identification criteria.
6. Ranking the alternatives to choose the best cloud service provider among all options.




Fig. 2: Block diagram of the multi-criteria selection method based on neutrosophic

3.3.1 Preliminaries Related to a Neutrosophic Set

Definition 1. [67]

In Neutrosophic set, the level of indeterminacy (*I*) introduced as a stand-alone element by the neutrosophic set (*NS*).

The truth value are neutrosophic set:

Consider the set *N*, which is defined as follows: $\mathbf{N} = \{(\mathbf{T}, \mathbf{I}, \mathbf{F}) : \mathbf{T}, \mathbf{I}, \mathbf{F} \subseteq [0, 1]\}$, a neutrosophic valuation. *n* is a mapping from the set of propositional formulae to *N*, meaning that for each sentence *x*, $N(x) = (T, I, F)$.

$$N = \{x, T_N(x), I_N(x), F_N(x) | x \in X\}, \tag{14}$$

where $T_N(x) : X \rightarrow]0, 1[$, $I_N(x) : X \rightarrow]0, 1[$, $F_N(x) : X \rightarrow]0, 1[$.

Definition 2. [67]

Single valued neutrosophic set (SVNS) was developed to make neutrosophic sets and set-theoretic operators more useful in practical applications. A single-valued neutrosophic set was introduced as a particular example of a neutrosophic set, which is a specialization of intuitionistic fuzzy sets to handle incomplete information.

A single value neutrosophic set *N* is defined by:

$$N = \{x, T_N(x), I_N(x), F_N(x) | x \in X\}, \tag{15}$$

where $T_N(x) : X \rightarrow [0, 1]$, $I_N(x) : X \rightarrow [0, 1]$, $F_N(x) : X \rightarrow [0, 1]$.

Definition 3. [68]

Single-valued neutrosophic numbers (SVN numbers) are represented by the symbol $N = (x, y, z)$, where $x, y, z \in [0, 1]$ and $a + b + c \leq 3$. Some qualitative information represented by linguistic phrases as (good "or" bad) and numbers. Many criteria decision-making methods have been modified for neutrosophic problems.

Let $N = \{x, T_N(x), I_N(x), F_N(x) | x \in X\}$ and $M = \{x, T_M(x), I_M(x), F_M(x) | x \in X\}$ be two single value neutrosophic set, the following calculations are denoted by:

$$N \oplus M = T_N(x) + T_M(x), T_N(x)T_M(x), I_N(x)I_M(x), F_N(x)F_M(x), \tag{16}$$

$$N \otimes M = T_N(x)T_M(x), I_N(x) + I_M(x) - I_N(x)I_M(x), F_N(x) + F_M(x) - F_N(x)F_M(x). \tag{17}$$

3.3.2 Building Neutrosophic Sets

Step 1: Determine the linguistic terms as well as their neutrosophic set.

The language terms that will be used to evaluate the alternatives should be identified by experts, who should then specify the neutrosophic set value for each linguistic term. In all subsequent evaluation processes, these linguistic phrases will be used.

Step 2: Create a Decision Matrix (DM) with a single value neutrosophic set.

Allow experts to analyze each alternative’s linguistic opinion in order to evaluate each criteria by comparing criteria and alternatives using the linguistic phrases they identified earlier. After computing the choice matrix, the linguistic word will be converted to a neutrosophic set value using the mapping function.

Step 3: Determine the Weights for Each Criteria.

The experts will offer linguistic opinions for each need based on linguistic expressions they have previously identified. Using a proper mapping function, the linguistic expressions offered from the specialist for each criteria are transformed into NS.

Step 4: Make the Weighted Decision Matrix Calculations (WDM).

Multiply DM with the weights results in the computation of the WDM in the neutrosophic set.

$$D^w = D \otimes W. \tag{18}$$

Step 5: Calculate the single valued neutrosophic negative (SVNNIS) and positive ideal solution (SVNPIS).

Two criteria can be utilized to choose the alternative are benefit criteria. where it should have the highest value possible according to experts. The SVNPIS and SVNNIS were developed with cost and benefit considerations in mind.

SVNPIS and SVNNIS, respectively, are the best and worst options. SVNPIS and SVNNIS are calculated using Equations 19 and 20, respectively.

$$V^+ = \text{SVNPIS} = [(T_1^+, I_1^+, F_1^+), (T_2^+, I_2^+, F_2^+), \dots, (T_3^+, I_3^+, F_3^+)], \tag{19}$$

$$V^- = \text{SVNNIS} = [(T_1^-, I_1^-, F_1^-), (T_2^-, I_2^-, F_2^-), \dots, (T_3^-, I_3^-, F_3^-)], \tag{20}$$

where

$$(T_1^+, I_1^+, F_1^+) = \begin{cases} < 1.0, 0.0, 0.0 > \text{ for } j \in J_1 \\ < 0.0, 1.0, 1.0 > \text{ for } j \in J_2 \end{cases}$$

$$(T_1^-, I_1^-, F_1^-) = \begin{cases} < 0.0, 1.0, 1.0 > \text{ for } j \in J_1 \\ < 1.0, 0.0, 0.0 > \text{ for } j \in J_2 \end{cases}$$

Apply the SVNPIS and SVNNIS to Calculate the Score for Each Option. Calculate the score for each

option using SVNPIS (V^+) and SVNNIS (V^-). The measurement employed to determine the score between alternative V_i from V^+ and V^- is depicted in Equations 21 and 22, respectively.

$$S_i^+ = D^W \cdot V^+ = \sum_{j=1}^n T_{D^W} \cdot T_{V^+} + I_{D^W} \cdot I_{V^+} + F_{D^W} \cdot F_{V^+} \tag{21}$$

$$S_i^- = D^W \cdot V^- = \sum_{j=1}^n T_{D^W} \cdot T_{V^-} + I_{D^W} \cdot I_{V^-} + F_{D^W} \cdot F_{V^-}. \tag{22}$$

Step 7: Calculate the Consistency of Each Option.

The consistency of each option is calculated as in Equation 23. The Consistency demonstrates how the option is to SVNNIS (V^-) and SVNPIS (V^+).

$$C_i = \frac{S_i^-}{S_i^+ + S_i^-}, \tag{23}$$

where the proximity score of option i is represented by C_i . According to each option’s proximity index, the choices are sorted.

Step 8: Rank the Options.

The proximity index is used to rank the options, with the option with the highest closeness index value being ranked best and the option with the lowest closeness index value being ranked worst.

3.3.3 Building Neutrosophic Algorithm

First, depending on each cloud service provider’s characteristics, specialists have specific linguistic requirements. To reduce subjective randomness. Then, by identifying uncertainty and applying the incomplete information provided by the selection committee, the weights of each linguistic value (DM) and attribute are continually determined. The DM’s preferences are compiled using the connections between the attributes. The weights of the DMs are determined rationally and applied for aggregation in this paradigm, in contrast to previous methods. The Neutrosophic Method is then expanded, and the decision matrix and weights of the attributes are used to define the priorities of the cloud service providers. The framework is put through two assessments; one that compares it to current ways and the other that performs an awareness evaluation of various approaches to assist in explaining its positive and negative aspects. The proposed Neutrosophic Algorithm’s pseudo-code is shown in Algorithm 1. The flowchart of the neutrosophic algorithm is shown in Figure 3.

Algorithm 1 Pseudo-code of Neutrosophic Algorithm

- 1: **Input:** n : number of Cloud Service Providers, m : number of Criteria Parameters
- 2: **Output:** Classification of Cloud Service Providers
- 3: Input Linguistics terms and their neutrosophic set by experts
- 4: Fill up the Linguistic Term with DM and the weights for each criterion.
- 5: Use Equation 18 to transform the DM and Weight of each QoS into a Neutrosophic DM and Weight Vector.
- 6: **for** $\langle T(x_{i,j}), I_A(x_{i,j}), F_V(x_{i,j}) \rangle$ in DM **do**
- 7: Use Equation 17.
- 8: **end for**
- 9: Compute SVNPIs and SVNNIS with respect to the DMs using Equations 19 and 20.
- 10: Calculate the Score of each alternative from SVNPIs and SVNNIS
- 11: **for** $i = 1$ **do**
- 12: $S_i^+ = D^W \cdot V^+$
- 13: $S_i^- = D^W \cdot V^-$
- 14: **end for**
- 15: Calculate the Consistency of each alternative using Equation 23.
- 16: **for** $i = 1$ **do**
- 17: $C_i = \frac{S_i^-}{S_i^- + S_i^+}$
- 18: **end for**
- 19: Sort the cloud service providers by C_i in descending order.

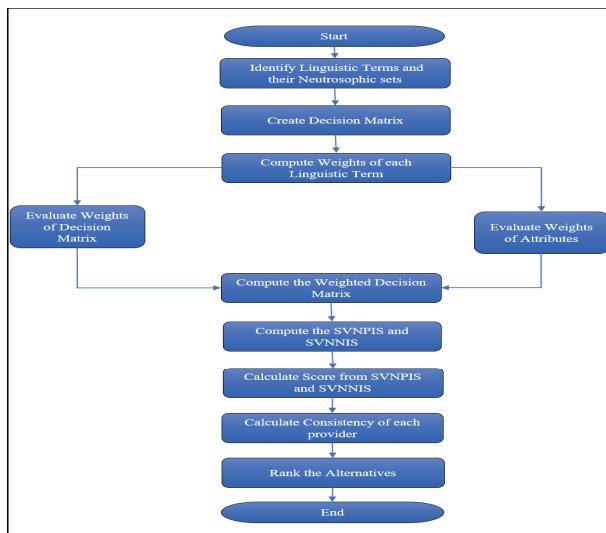


Fig. 3: Flowchart of the Neutrosophic Algorithm

4 Results and Discussion

4.1 Case Study

The case study in this paper uses five providers: MAPPMatching, Compound2, USDADData, GBNIRHolidayDates, and CasUsers and eight different criteria.

4.1.1 Criteria Selection

Select the best suitable provider as criteria that used to asses each provider as in Figure 4. It defined as :

Response Time: Time taken to send a request and receive a response.

Availability: Number of successful invocations/total invocations.

Throughput: Total number of invocations for a given period of time.

Successability: Number of response / numbers of request messages.

Reliability: Ratio of the number of error messages to total messages.

Latency: Time taken for the server to process a given request.

RSCS: Response time of customer services.

Cost: The amount or equivalent paid or charged for the cloud service provider.

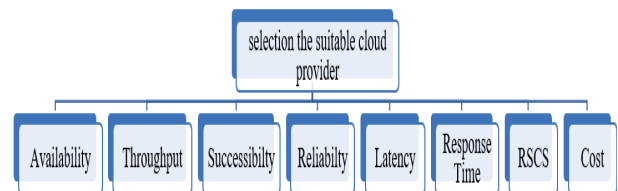


Fig. 4: Hierarchy of providers criteria

4.1.2 Provider Assessment

The second step in the methodology is provider identification. In this step, the methodology uses the data after imputation from the modified GAN as mentioned in Table 1. In Table 1, the first column refers to the names of providers for the case study, and row 1 refers to the criteria in the case study.

4.1.3 Linguistics Terms

This section describes each linguistics term and the neutrosophic set according to experts' opinions. The mapping between linguistic terms and the neutrosophic set is shown in Table 2.

4.1.4 Creation of DM

The cloud experts use their knowledge to make the DM according to the linguistic terms they have as in Table 2. The DM for five cloud service providers and eight criteria by the linguistic opinions of experts is shown in Table 3.

4.1.5 Determination of Criteria Weights

According to personal interests, organizational needs, or the advice of cloud professionals, cloud users rank the importance of each of the eight criteria. The weights of each criteria provided by the cloud user are shown in Table 4.

4.1.6 Conversion of DM and Weights of Criteria to Neutrosophic Sets

It describes how to transform DM and criteria weights into neutrosophic DM and neutrosophic weights like mapping function in Table 2. The language expression is transformed to the neutrosophic value. The priority assigned to the linguistic phrase by the cloud user are shown in Table 6.

4.1.7 Computation of Weighted DM

Using Equation 1, the product of neutrosophic DM and neutrosophic criteria weights provides the weighted DM. The creation procedure in a neutrosophic environment to compute the (T, I, F) values of a weighted DM element is illustrated in Equation 17. In Table 7, the weighted DM is displayed.

4.1.8 Establishing of SVNPNIS and SVNNIS

Cost-benefit analysis is used to calculate the (SVNPNIS) and (SVNNIS). The best and worst options are SVNPNIS and SVNNIS. Equations 19 and 20 are used to calculate the SVNPNIS and SVNNIS, respectively. Table 8 displays the computed values for SVNPNIS and SVNNIS

4.1.9 Calculate the Score of the Alternatives from SVNPNIS and SVNNIS

The score the alternatives from SVNPNIS and SVNNIS is calculated using Equations 21 and 22, when $V^+ = 1$ or $V^- = 1$ and results are shown in Table 9.

4.1.10 Determination of Consistency of each Cloud Service Provider and Ranking

Each cloud service provider's consistency is calculated using Equation 23 and its value is displayed in Table 9 "GBNIRHolidayDates" is ranked highest among cloud service providers, whereas "MAPPMatching" is ranked lowest. Depending on how important the user-provided criteria factors are, the cloud provider's rankings are GBNIRHolidayDates, USDADData, CasUsers, Compound2, and MAPP Matching.

4.2 Comparison and Computational Time

The effectiveness of the suggested framework is measured against various multi-criteria decision-making techniques that are currently accessible, including (AHP, TOPSIS, and VIKOR Neutrosophic). The experiment was conducted on a computer with a 1.1GHz Intel i5-1035G4 10th Gen, 16 GB of RAM, and Windows 10 64-bit installed, and it was successful in achieving high performance in a short amount of time, especially with the numerous providers. The study was conducted using 1507 providers and the eight criteria listed in Table 1. The implementation of Algorithm 1 helps to reduce the computational time because it performs Equation 21 and Equation 22 if and only if $V^+ = 1$ or $V^- = 1$ that leads to decreasing steps of the algorithm. First, we evaluated the framework using 100 cloud service providers and recorded the computation time. Next, we gradually increased the number of providers while recording the computation time for each iteration. In Tables 10, 11, the suggested framework's computation time is contrasted with that of a number of multi-criteria decision-making techniques, including AHP, TOPSIS, and VIKOR Neutrosophic. And Figure 5 compares them side by side. Figure 5 illustrates that the computation time of the presented model is better than other previous methods with 0.05 (sec) rather than 0.057 (sec), 0.061 (sec), and 0.065 (sec) for Vikor Neutrosophic, TOPSIS, and AHP, respectively.

The effectiveness of the suggested framework is measured against various multi-criteria decision-making techniques that are currently accessible, including (AHP, TOPSIS, and VIKOR Neutrosophic). The experiment was conducted on a computer with a 1.1GHz Intel i5-1035G4 10th Gen, 16 GB of RAM, and Windows 10 64-bit installed, and it was successful in achieving high performance in a short amount of time, especially with the numerous providers. The study was conducted using 1507 providers and the eight criteria listed in Table 1. The implementation of Algorithm 1. helps to reduce the computational time because it performs Equation 21 and Equation 22 if and only if $V^+ = 1$ or $V^- = 1$ that leads to decreasing steps of the algorithm. First, we evaluated the framework using 100 cloud service providers and recorded the computation time. Next, we gradually increased the number of providers while recording the computation time for each iteration. In Tables 10, 11, the suggested framework's computation time is contrasted with that of a number of multi-criteria decision-making techniques, including AHP, TOPSIS, and VIKOR Neutrosophic. And Figure 5 compares them side by side. Figure 5 illustrates that the computation time of the presented model is better than other previous methods with 0.05 (sec) rather than 0.057 (sec), 0.061 (sec), and 0.065 (sec) for Vikor Neutrosophic, TOPSIS, and AHP, respectively.

Table 1: Providers table and criteria.

Cloud Provider	Availability (%)	Throughput (invokes/sec)	Successability (%)	Reliability (%)	Latency (ms)	Response Time (ms)	RSCS (ms)	Cost(\$)
MAPPMatching	89	7	90	73	104	303	97	30
Compound2	85	16	95	73	1	482	96	21
USDADData	89	1	96	73	2	659	181	29
GBNIRHolidayDates	98	12	100	67	22	126	15	46
CasUsers	87	2	95	73	58	35	35	26

Table 2: Linguistics terms and neutrosophic set.

Linguistic	Term	Neutrosophic Set
Absolutely Good	AG	$\langle 0.98, 0.01, 0.98 \rangle$
Very Good	VG	$\langle 0.90, 0.60, 0.92 \rangle$
Good	G	$\langle 0.80, 0.65, 0.86 \rangle$
Medium-Good	MG	$\langle 0.75, 0.60, 0.82 \rangle$
Average	AV	$\langle 0.50, 0.50, 0.92 \rangle$
Medium-Bad	MB	$\langle 0.60, 0.70, 0.79 \rangle$
Bad	B	$\langle 0.70, 0.80, 0.88 \rangle$
Very Bad	VB	$\langle 0.60, 0.90, 0.92 \rangle$
Absolutely Bad	AB	$\langle 0.01, 0.98, 0.98 \rangle$

Table 3: DM with linguistics term.

Cloud Provider	Availability%	Throughput	Successability %	Reliability %	Latency ms	Response Time ms	RSCS	Cost
MAPPMatching	AG	G	VB	AB	B	G	VG	AG
Compound2	MG	AG	B	AV	AB	VG	AG	G
USDADData	AB	B	AG	MB	G	AV	AV	VG
GBNIRHolidayDates	B	AV	G	AB	AG	MB	MB	VB
CasUsers	VB	VG	AG	MB	AV	G	G	VG

Table 4: Weights of criteria.

Criteria	Availability%	Throughput	Successability %	Reliability %	Latency ms	Response Time ms	RSCS	Cost
Weight	G	AV	VB	B	VG	G	B	AV

Table 5: DM with linguistics term.

Cloud Provider	Availability%	Throughput	Successability %	Reliability %	Latency ms	Response Time ms	RSCS	Cost
MAPPMatching	$\langle 0.98, 0.01, 0.98 \rangle$	$\langle 0.80, 0.65, 0.86 \rangle$	$\langle 0.60, 0.90, 0.92 \rangle$	$\langle 0.01, 0.98, 0.98 \rangle$	$\langle 0.70, 0.80, 0.88 \rangle$	$\langle 0.80, 0.65, 0.86 \rangle$	$\langle 0.90, 0.60, 0.92 \rangle$	$\langle 0.98, 0.01, 0.98 \rangle$
Compound2	$\langle 0.75, 0.60, 0.82 \rangle$	$\langle 0.98, 0.01, 0.98 \rangle$	$\langle 0.70, 0.80, 0.88 \rangle$	$\langle 0.50, 0.50, 0.62 \rangle$	$\langle 0.01, 0.98, 0.98 \rangle$	$\langle 0.90, 0.60, 0.92 \rangle$	$\langle 0.98, 0.01, 0.98 \rangle$	$\langle 0.80, 0.65, 0.86 \rangle$
USDADData	$\langle 0.01, 0.01, 0.98 \rangle$	$\langle 0.70, 0.80, 0.88 \rangle$	$\langle 0.98, 0.01, 0.98 \rangle$	$\langle 0.60, 0.70, 0.97 \rangle$	$\langle 0.80, 0.65, 0.86 \rangle$	$\langle 0.60, 0.90, 0.92 \rangle$	$\langle 0.50, 0.50, 0.62 \rangle$	$\langle 0.90, 0.60, 0.92 \rangle$
GBNIRHolidayDates	$\langle 0.70, 0.80, 0.88 \rangle$	$\langle 0.50, 0.50, 0.62 \rangle$	$\langle 0.80, 0.65, 0.86 \rangle$	$\langle 0.01, 0.98, 0.98 \rangle$	$\langle 0.98, 0.01, 0.98 \rangle$	$\langle 0.90, 0.60, 0.92 \rangle$	$\langle 0.60, 0.70, 0.79 \rangle$	$\langle 0.60, 0.90, 0.92 \rangle$
CasUsers	$\langle 0.60, 0.90, 0.92 \rangle$	$\langle 0.90, 0.60, 0.92 \rangle$	$\langle 0.98, 0.01, 0.98 \rangle$	$\langle 0.60, 0.70, 0.79 \rangle$	$\langle 0.50, 0.50, 0.62 \rangle$	$\langle 0.60, 0.90, 0.92 \rangle$	$\langle 0.80, 0.65, 0.86 \rangle$	$\langle 0.90, 0.60, 0.92 \rangle$

Table 6: Weights of criteria.

Criteria	Availability%	Throughput	Successability %	Reliability %	Latency ms	Response Time ms	RSCS	Cost
Weight	$\langle 0.80, 0.65, 0.86 \rangle$	$\langle 0.50, 0.50, 0.62 \rangle$	$\langle 0.60, 0.90, 0.92 \rangle$	$\langle 0.70, 0.80, 0.88 \rangle$	$\langle 0.90, 0.60, 0.92 \rangle$	$\langle 0.80, 0.65, 0.86 \rangle$	$\langle 0.70, 0.80, 0.88 \rangle$	$\langle 0.50, 0.50, 0.62 \rangle$

Table 7: Weighted neutrosophic DM.

Cloud Provider	Availability%	Throughput	Successability %	Reliability %	Latency ms	Response Time ms	RSCS	Cost
MAPPMatching	$\langle 0.784, 0.01, 0.98 \rangle$	$\langle 0.80, 0.65, 0.86 \rangle$	$\langle 0.60, 0.90, 0.92 \rangle$	$\langle 0.01, 0.98, 0.98 \rangle$	$\langle 0.70, 0.80, 0.88 \rangle$	$\langle 0.80, 0.65, 0.86 \rangle$	$\langle 0.90, 0.60, 0.92 \rangle$	$\langle 0.98, 0.01, 0.98 \rangle$
Compound2	$\langle 0.75, 0.60, 0.82 \rangle$	$\langle 0.98, 0.01, 0.98 \rangle$	$\langle 0.70, 0.80, 0.88 \rangle$	$\langle 0.50, 0.50, 0.62 \rangle$	$\langle 0.01, 0.98, 0.98 \rangle$	$\langle 0.90, 0.60, 0.92 \rangle$	$\langle 0.98, 0.01, 0.98 \rangle$	$\langle 0.80, 0.65, 0.86 \rangle$
USDADData	$\langle 0.01, 0.01, 0.98 \rangle$	$\langle 0.70, 0.80, 0.88 \rangle$	$\langle 0.98, 0.01, 0.98 \rangle$	$\langle 0.60, 0.70, 0.97 \rangle$	$\langle 0.80, 0.65, 0.86 \rangle$	$\langle 0.60, 0.90, 0.92 \rangle$	$\langle 0.50, 0.50, 0.62 \rangle$	$\langle 0.90, 0.60, 0.92 \rangle$
GBNIRHolidayDates	$\langle 0.70, 0.80, 0.88 \rangle$	$\langle 0.50, 0.50, 0.62 \rangle$	$\langle 0.80, 0.65, 0.86 \rangle$	$\langle 0.01, 0.98, 0.98 \rangle$	$\langle 0.98, 0.01, 0.98 \rangle$	$\langle 0.90, 0.60, 0.92 \rangle$	$\langle 0.60, 0.70, 0.79 \rangle$	$\langle 0.60, 0.90, 0.92 \rangle$
CasUsers	$\langle 0.60, 0.90, 0.92 \rangle$	$\langle 0.90, 0.60, 0.92 \rangle$	$\langle 0.98, 0.01, 0.98 \rangle$	$\langle 0.60, 0.70, 0.79 \rangle$	$\langle 0.50, 0.50, 0.62 \rangle$	$\langle 0.60, 0.90, 0.92 \rangle$	$\langle 0.80, 0.65, 0.86 \rangle$	$\langle 0.90, 0.60, 0.92 \rangle$

Table 8: SVNPIs and SVNNIS values

	Availability%	Throughput	Successability %	Reliability %	Latency ms	Response Time ms	RSCS	Cost
SVNPIS	<1,0,0>	<1,0,0>	<1,0,0>	<1,0,0>	<0,1,1>	<0,1,1>	<0,1,1>	<0,1,1>
SVNNIS	<0,1,1>	<0,1,1>	<0,1,1>	<0,1,1>	<1,0,0>	<1,0,0>	<1,0,0>	<1,0,0>

Table 9: Ranking table

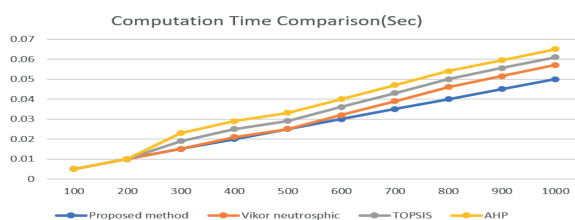
Cloud Provider	S+	S-	Consistency %	Rank
MAPPMatching	8.7271	9.7897	52.86928627	2
Compound2	9.2706	8.972	49.18158596	5
USDADData	8.7926	9.6588	52.34724736	3
GBNIRHolidayDates	8.5826	9.7882	53.28129423	1
CasUsers	9.3442	9.4776	50.35437631	4

Table 10: Comparison of the proposed framework with other methods

Method name	Rank robustness	Fuzzy capability
Proposed method	Yes	Yes
Vikor neutrosophic [70]	Yes	Yes
TOPSIS [71]	No	No
AHP [71]	No	NO

Table 11: Computational Time Table

No. Of Providers	Proposed method (sec)	Vikor Neutrosophic(sec) [70]	TOPSIS (sec) [71]	AHP (sec) [71]
100	0.005	0.005	0.005	0.005
200	0.01	0.01	0.01	0.01
300	0.015	0.015	0.019	0.023
400	0.02	0.021	0.025	0.029
500	0.025	0.0251	0.0291	0.0331
600	0.03	0.032	0.036	0.04
700	0.035	0.039	0.043	0.047
800	0.04	0.046	0.05	0.054
900	0.045	0.0515	0.0555	0.0595
1000	0.05	0.057	0.061	0.065

**Fig. 5:** Comparison chart between the proposed method and other methods

5 Conclusions

The selection of cloud service providers is one of the most significant problems for any company intending to transfer its work to cloud architectures for a variety of properties. This paper presents a novel framework based

on modified neutrosophic algorithm to select the best suitable provider for any stakeholder. The framework can impute the problem of missing values during data gathering using a modified version of GAN and then rank the providers after completing the data according to the organization's needs. The experiments have proved the efficiency and accuracy of the framework in both imputations of the missing data and in selecting suitable providers. Compared to previous ways, the suggested method takes less time. specially when using large numbers of providers. The computation time for 1000 providers using the proposed model was 0.05 (sec), as opposed to 0.057 (sec), 0.061 (sec), and 0.065 (sec) in other comparable publications. The suggested framework can be strengthened in subsequent work by incorporating group decision making when selecting a cloud service and by combining it with other MCDM techniques. It can

also be integrated with rough set theory or expanded to an interval-valued neutrosophic set in order to better address.

Acknowledgement

The authors gratefully thank to Editor-in-Chief and the anonymous referees for their helpful and suggestive comments.

References

- [1] Z. Zheng, X. Wu, Y. Zhang, M. R. Lyu and J. Wang, Qos ranking prediction for cloud services, *IEEE Transactions on Parallel and Distributed Systems*, **24**, 6, 1213-1222, (2012).
- [2] S. K. Garg, S. Versteeg and R. Buyya, A framework for ranking of cloud computing services, *Future Generation Computer Systems*, **29**, 4, 1012-1023, (2013).
- [3] A. A. Jalamneh and M. A. Khder, Challenges of implementing cloud computing in the arab libraries environment, *Information Sciences Letters*, **10**, 1, (2021).
- [4] B. Swiderski, L. Gielata, P. Olszewski, S. Osowski and M. Kołodziej, Deep neural system for supporting tumor recognition of mammograms using modified gan, *Expert Systems with Applications*, **164**, (2021).
- [5] Z.-S. Chen, K.-R. Hou, M.-Y. Zhu, Y. Xu and Q.-X. Zhu, A virtual sample generation approach based on a modified conditional gan and centroidal voronoi tessellation sampling to cope with small sample size problems: Application to soft sensing for chemical process, *Applied Soft Computing*, **101**, (2021).
- [6] U. C. Sharma, K. Zhao, K. Mentkowski, S. D. Sonkawade, B. Karthikeyan, J. K. Lang and L. Ying, Modified gan augmentation algorithms for the mriclassification of myocardial scar tissue in ischemic cardiomyopathy, *Frontiers in Cardiovascular Medicine*, (2021).
- [7] F. Smarandache, *A unifying field in logics: neutrosophic logic. Neutrosophy, neutrosophic set, neutrosophic probability: neutrosophic logic. Neutrosophy, neutrosophic set, neutrosophic probability*, Infinite Study, (2005).
- [8] B. Martens and F. Teuteberg, Decision-making in cloud computing environments: A cost and risk based approach, *Information Systems Frontiers*, **14**, 4, 871-893, (2012).
- [9] R.-x. Liang, J.-q. Wang and H.-y. Zhang, A multi-criteria decision-making method based on single-valued trapezoidal neutrosophic preference relations with complete weight information, *Neural Computing and Applications*, **30**, 11, 3383-3398, (2018).
- [10] R.-x. Liang, J.-q. Wang and L. Li, Multicriteria group decision-making method based on interdependent inputs of single-valued trapezoidal neutrosophic information, *Neural Computing and Applications*, **30**, 1, 241-260, (2018).
- [11] R. Liang, J. Wang and H. Zhang, Evaluation of ecommerce websites: An integrated approach under a single-valued trapezoidal neutrosophic environment, *Knowledge-Based Systems*, **135**, 44-59, (2017).
- [12] S. Broumi, M. Talea, F. Smarandache and A. Bakali, Decision-making method based on the interval valued neutrosophic graph, *Future Technologies Conference (FTC)*, *IEEE*, 44-50, (2016).
- [13] S. Broumi, M. Talea, A. Bakali and F. Smarandache, Application of dijkstra algorithm for solving interval valued neutrosophic shortest path problem, *IEEE Symposium Series on Computational Intelligence (SSCI)*, 1-6, (2016).
- [14] S. Broumi, A. Bakali, M. Talea, F. Smarandache and L. Vladareanu, "Shortest path problem under triangular fuzzy neutrosophic information, *10th International Conference on Software, Knowledge, Information Management & Applications (SKIMA)*, *IEEE*, 169-174, (2016).
- [15] S. Broumi, A. Bakal, M. Talea, F. Smarandache and L. Vladareanu, Applying dijkstra algorithm for solving neutrosophic shortest path problem, *International Conference on Advanced Mechatronic Systems (ICAMechS)*, *IEEE*, 412-416, (2016).
- [16] S. Zhang, S. Zhang, X. Chen and X. Huo, Cloud computing research and development trend, *Second International Conference on Future Networks*, *IEEE*, 93-97, (2010).
- [17] V. Andrikopoulos, Z. Song and F. Leymann, Supporting the migration of applications to the cloud through a decision support system, *Sixth International Conference on Cloud Computing*, *IEEE*, 565-572, (2013).
- [18] P. Pocatilu, F. Alecu and M. Vetrici, Using cloud computing for e-learning systems, in *Proceedings of the 8th WSEAS International Conference on Data Networks, Communications, Computers, Citeseer*, **9**, 54-59, (2009).
- [19] M. Armbrust, A. Fox, R. Griffith, A. D. Joseph, R. Katz, A. Konwinski, G. Lee, D. Patterson, A. Rabkin, I. Stoica, et al., A view of cloud computing, *Communications of the ACM*, **53**, 4, 50-58, (2010).
- [20] M. Cusumano, Cloud computing and saas as new computing platforms, *Communications of the ACM*, **53**, 4, 27-29, (2010).
- [21] R. H. Katz, Tech titans building boom, *IEEE Spectrum*, **46**, 2, 40-54, (2009).
- [22] S. Wibowo, H. Deng and W. Xu, Evaluation of cloud services: A fuzzy multi-criteria group decision making method, *Algorithms*, **9**, 4, (2016).
- [23] C. Chen, W. Hung and W. Zhang, Using intervalvalued fuzzy vikor for cloud service provider evaluation and selection, in *Proceedings of the International Conference on Business and Information (BA13)*, (2013).
- [24] C.-H. Yeh, H. Deng, S. Wibowo and Y. Xu, Multicriteria group decision support for information systems project selection, in *International Conference on Industrial, Engineering and Other Applications of Applied Intelligent Systems*, Springer52-161, (2009).
- [25] M. Abdel-Basset, M. Mohamed and V. Chang, Nmcd: A framework for evaluating cloud computing services, *Future Generation Computer Systems*, **86**, 12-29, (2018).
- [26] N. Safari, F. Safari, M. Kazemi, S. Ahmadi and A. Hasanzadeh, Prioritisation of cloud computing acceptance indicators using fuzzy ahp, *International Journal of Business Information Systems*, **19**, 4, 488-504, (2015).
- [27] M. Sun, T. Zang, X. Xu, and R. Wang, Consumercentered cloud services selection using ahp, *International Conference on Service Sciences (ICSS)*, *IEEE*, 1-6, (2013).
- [28] X. Cheng, Cloud computing decision-making using a fuzzy ahp approach, *Systemes d'information management*, **20**, 4, 89-116, (2015).
- [29] C.-T. Chen and K.-H. Lin, A decision-making method based on interval-valued fuzzy sets for cloud service evaluation, *4th International conference on new trends in information science and service science*, *IEEE*, 559-564, (2010).

- [30] N. A. Nabeeh, F. Smarandache, M. Abdel-Basset, H. A. El-Ghareeb and A. Aboelfetouh, An integrated neutrosophic-topsis approach and its application to personnel selection: A new trend in brain processing and analysis, *IEEE Access*, **7**, 29734-29744, (2019).
- [31] R. K. Tiwari and R. Kumar, A framework for prioritizing cloud services in neutrosophic environment, *Journal of King Saud University Computer and Information Sciences*, (2020).
- [32] D. Stanujkic, D. Karabasevic, G. Popovic, E. K. Zavadskas and M. Stanujkic, Cloud computing technology selection using a novel neutrosophic extension of the multimooora method based on the use of interval-valued and triangular-valued neutrosophic numbers, *Neutrosophic Operational Research*, 367-394, Springer, (2021).
- [33] H. Ma, Z. Hu, K. Li and H. Zhang, Toward trustworthy cloud service selection: A time-aware approach using interval neutrosophic set, *Journal of Parallel and Distributed Computing*, **96**, 75-94, (2016).
- [34] M. Abdel-Basset, G. Manogaran and M. Mohamed, A neutrosophic theory based security approach for fog and mobile-edge computing, *Computer Networks*, **157**, 122-132, (2019).
- [35] S. Dhawan, B. Gupta, A. Kumar and J. Bansal, Quantum cloud computing-a scientometric assessment of global research for the period 1999-2020, *Library Herald*, **59**, 1, 1-23, (2021).
- [36] P. Saripalli and G. Pingali, Madmac: Multiple attribute decision methodology for adoption of clouds, *IEEE 4th International Conference on Cloud Computing*, 316-323, (2011).
- [37] M. Menzel and R. Ranjan, Cloudgenius: decision support for web server cloud migration, *Proceedings of the 21st international conference on World Wide Web*, 979-988, (2012).
- [38] M. D. Dikaiakos, D. Katsaros, P.Mehra, G. Pallis and A. Vakali, Cloud computing: Distributed internet computing for it and scientific research, *IEEE Internet Computing*, **13**, 5, 10-13, (2009).
- [39] P. Hoberg, J. Wollersheim and H. Krcmar, The business perspective on cloud computing-a literature review of research on cloud computing, (2012).
- [40] H. Demirkan and D. Delen, Leveraging the capabilities of service-oriented decision support systems: Putting analytics and big data in cloud, *Decision Support Systems*, **55**, 1, 412-421, (2013).
- [41] R. F. El-Gazzar, A literature review on cloud computing adoption issues in enterprises, *International Working Conference on Transfer and Diffusion of IT*, 214-242, Springer, (2014).
- [42] S. Wibowo and H. Deng, Intelligent decision support for effectively evaluating and selecting ships under uncertainty in marine transportation, *Expert Systems with Applications*, **39**, 8, 6911-6920, (2012).
- [43] K. Ferguson-Boucher, Cloud computing: A records and information management perspective, *IEEE Security & Privacy*, **9**, 6, 63-66, (2011).
- [44] M. Menzel, M. Schönherr and S. Tai, (mc2) 2: criteria, requirements and a software prototype for cloud infrastructure decisions, *Software: Practice and Experience*, **43**, 11, 1283-1297, (2013).
- [45] K. P. Teruel, J. C. Cedeno, H. L. Gavilanez and C. B. Diaz, A framework for selecting cloud computing services based on consensus under single valued neutrosophic numbers, *Neutrosophic Sets and Systems*, **22**, 1, (2018).
- [46] M. H. Nejat, H. Motameni, H. Vahdat-Nejad and B. Barzegar, Efficient cloud service ranking based on uncertain user requirements, *Cluster Computing*, **25**, 1, 485-502, (2022).
- [47] X. Peng and F. Smarandache, Novel neutrosophic dombi bonferroni mean operators with mobile cloud computing industry evaluation, *Expert Systems*, **36**, 4, (2019).
- [48] A. Chakraborty, S. P. Mondal, S. Alam and A. Dey, Classification of trapezoidal bipolar neutrosophic number, de-bipolarization technique and its execution in cloud service-based mcgdm problem, *Complex & Intelligent Systems*, **7**, 1, 145-162, (2021).
- [49] S. Broumi, A. Bakal, M. Talea, F. Smarandache and L. Vladareanu, Applying dijkstra algorithm for solving neutrosophic shortest path problem, *International Conference on Advanced Mechatronic Systems (ICAMechS)*, *IEEE*, 412-416, (2016).
- [50] M. Abdel-Basset, G. Manogaran, A. Gamal and F. Smarandache, A hybrid approach of neutrosophic sets and dematel method for developing supplier selection criteria, *Design Automation for Embedded Systems*, **22**, 3, 257-278, (2018).
- [51] A. Karaşan, E. Boltürk, and C. Kahraman, A novel neutrosophic codas method: Selection among wind energy plant locations, *Journal of Intelligent & Fuzzy Systems*, **36**, 2, 1491-1504, (2019).
- [52] M. Abdel-Basset, M. Mohamed and F. Smarandache, A hybrid neutrosophic group anp-topsis framework for supplier selection problems, *Symmetry*, **10**, 6, (2018).
- [53] M. Godse and S. Mulik, An approach for selecting software-as-a-service (saas) product, *IEEE International Conference on Cloud Computing*, 155-158, (2009).
- [54] A. V. Dastjerdi and R. Buyya, A taxonomy of qos management and service selection methodologies for cloud computing, *Cloud Computing: Methodology, Systems, and Applications*, **15**, 16-76, (2011).
- [55] M. Whaiduzzaman, A. Gani, N. B. Anuar, M. Shiraz, M. N. Haque and I. T. Haque, Cloud service selection using multicriteria decision analysis, *The Scientific World Journal*, **2014**, (2014).
- [56] S. K. Garg, S. Versteeg and R. Buyya, A framework for ranking of cloud computing services, *Future Generation Computer Systems*, **29**, 4, 1012-1023, (2013).
- [57] G. Baranwal and D. P. Vidyarthi, A cloud service selection model using improved ranked voting method, *Concurrency and Computation: Practice and Experience*, **28**, 13, 3540-3567, (2016).
- [58] J. Sidhu and S. Singh, Improved topsis method based trust evaluation framework for determining trustworthiness of cloud service providers, *Journal of Grid Computing*, **15**, 1, 81-105, (2017).
- [59] A. Tripathi, I. Pathak and D. P. Vidyarthi, Integration of analytic network process with service measurement index framework for cloud service provider selection, *Concurrency and Computation: Practice and Experience*, **29**, 12, (2017).
- [60] R. R. Kumar, S. Mishra and C. Kumar, Prioritizing the solution of cloud service selection using integrated

- mcDM methods under fuzzy environment, *The Journal of Supercomputing*, **73**, 11, 4652-4682, (2017).
- [61] R. R. Kumar, S. Mishra and C. Kumar, A novel framework for cloud service evaluation and selection using hybrid mcDM methods, *Arabian Journal for Science and Engineering*, **43**, 12, 7015-7030, (2018).
- [62] S. Lee and K.-K. Seo, A hybrid multi-criteria decision-making model for a cloud service selection problem using bsc, fuzzy delphi method and fuzzy ahp, *Wireless Personal Communications*, **86**, 1, 57-75, (2016).
- [63] C. Z. Rădulescu and I. C. Rădulescu, An extended topsis approach for ranking cloud service providers, *Studies in Informatics and Control*, **26**, 2, 183-192, (2017).
- [64] A. Basu and S. Ghosh, Implementing fuzzy topsis in cloud type and service provider selection, *Advances in Fuzzy Systems*, **2018**, (2018).
- [65] A. Basu and S. Ghosh, Implementing fuzzy topsis in cloud type and service provider selection, *Advances in Fuzzy Systems*, **2018**, (2018).
- [66] L. Sun, H. Dong, O. K. Hussain, F. K. Hussain and A. X. Liu, A framework of cloud service selection with criteria interactions, *Future Generation Computer Systems*, **94**, 749-764, (2019).
- [67] F. Smarandache, Neutrosophic set-a generalization of the intuitionistic fuzzy set, (2002).
- [68] I. Deli and Y. Şubaş, A ranking method of single valued neutrosophic numbers and its applications to multi-attribute decision making problems, *International Journal of Machine Learning and Cybernetics*, **8**, 4, 1309-1322, (2017).
- [69] Y.-H. Huang, G.-W. Wei and C. Wei, Vikor method for interval neutrosophic multiple attribute group decision-making, *Information*, **8**, 4, (2017).
- [70] P. Biswas, S. Pramanik and B. C. Giri, Topsis method for multi-attribute group decision-making under single-valued neutrosophic environment, *Neural Computing and Applications*, **27**, 3, 727-737, (2016).
- [71] S. K. Garg, S. Versteeg, and R. Buyya, A framework for ranking of cloud computing services, *Future Generation Computer Systems*, **29**, 4, 1012-1023, (2013).
-



Mohammed Attya

He was born in Egypt, in 1998. She received the B.Sc. degree in information system from Kafr El-shiekh University and the M.Sc. degree in information system from menoufia University, Egypt, in 2020 and 2023, respectively. He is currently

an Assistant Lecturer of information system with the Faculty of Computers and Information, Kafr El-Sheikh University. He has published many research articles published in prestigious international conferences and reputable journals. His current research interests include big data analysis, semantic web, linked open data, data mining, decision making, decision support systems and machine learning.



Ahmed Sakr

He received the B.Sc. degree (Hons.) in mathematics and computer science and the M.Sc. degree in computer science from Menoufia University, Egypt, in 2008 and 2013, respectively, and the Ph.D. degree in computer science from Menoufia

University, Egypt, in 2016. He is currently a associate professor at faculty of computers and information Menoufia University. He has authored or co-authored many publications, in ranked journal including refereed IEEE, conference papers. His areas of interests are multimedia content encryption, big data security, secret media sharing, information hiding, cloud computing, bioinformatics and DNA encryption.



Hatem Mohamed

He is a Professor in Information System and Dean of faculty of computers and information at Menoufia University, Egypt . His research interest includes software testing, software engineering, distributed system, cloud computing,

IoT, big Data analytics, and bioinformatics.



Faisal Al-Showaikh

He is an Associate Professor in Computational Mathematics and Acting Dean of Student Affairs at Ahlia University, Kingdom of Bahrain since January 2020. He was Mathematics Chairman, at Mathematics Department, College of Science, University of

Bahrain.

Mostafa Kamel

He was born in Egypt, in 1964. He received the B.Sc. degree in electrical power from Alexandria University, the M.Sc. degree in mathematical engineering from Alexandria University, Egypt, in 2001 and Ph.D degree in mathematical engineering from Menoufia University, Egypt, in 2006. He is currently an Associated Professor of mathematical engineering with the Higher Institute of Engineering and Technology, Kafr El-Sheikh, Egypt. He was published many research articles published in prestigious international conferences and reputable journals. My current research interests include big data analysis, semantic web, linked open data, data mining, decision making, decision support systems and machine learning.

